


## SHURE PG58-XLR-B

### TECHNICAL DETAILS

Device type	Microphone
Frequency response (Hz)	50 ~ 16000
Output impedance (Ω)	300
Microphone type	Dynamic
Polar pattern	Cardioid
Microphone sensitivity (dBV/Pa)	-55 (1.79mV/Pa, 1kHz)
Microphone net weight (kg)	0.294

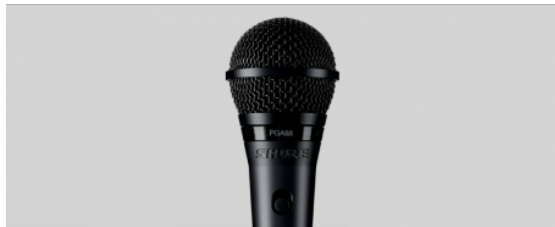

### PRODUCT DESCRIPTION

SQM Rental House offers a PG58-XLR-B wired microphone by Shure, which is equipped with a three-pin XLR connector and a 4.57-meter long XLR-XLR cable.

Shure PG58-XLR-B is a dynamic microphone with cardioid characteristics. The microphone's frequency response range is from 60 to 15,000 hertz. The characteristic diagram is not flat - there are deviations in the range from about -25 (for high frequencies) to +5 decibels.

The microphone efficiency is -53dBV/Pa (1.79mV/Pa at 1kHz), and the output impedance at 1kHz excitation is 300 ohms.

Weighing 294g, the Shure PG58-XLR-B microphone is ideal for capturing and reproducing great-quality vocal.

Product link:

<https://rentalhouse.sqm.eu/gb/microphones/219-shure-pg58-xlr-b.html>